

XTR-47DVF-DN-LAN

Vandal Proof Dome Network Camera



- Full frame rate up to D1 (25fps@720x576) resolution
- Compatible with MPEG4 standard
- Superior image quality (540 TV Lines)
- Combines superior imaging with a Vandal-proof housing
- Rugged, compact specially designed for installable anywhere (Indoor / Outdoor)
- Built-in network interface (10Base-T/100Base-TX) for remote monitoring by PC
- Interface protocol : TCP/IP, HTTP, UDP, DHCP, RTP, RTSP, SMTP, DDNS
- Quick & easy set up with user friendly GUI
- Sophisticated motion detection
- Support pre & post alarm record in client PC
- Notify events via e-mail

Superior image quality

Super high-resolution imaging 540 horizontal TV lines



Removing Picture Noise

Incredible Noise Reduction for Picture Quality & File size




Specifications


MODEL		NTSC	PAL
Image sensor		1/3" SONY Super - HAD Color CCD	
Total Pixels		811(H) x 508(V)	795 (H) x 596 (V)
Scanning system		2 : 1 interlace	
Sync System		Internal / Line lock	
Electronic shutter		1/60 ~ 1/120,000 sec.	1/50 ~ 1/120,000 sec.
Resolution		540 TV lines (Color)	
Minimum illumination		0.3 lux (Color), 0.002 lux (Sens-up)	
Video output		1.0 Vp-p (75 ohms, composite)	
S/N ratio		50dB (AGC off)	
NET WORK	Display Resolution	D1(PAL: 720 x 576, NTSC: 720 x 480), 640 x 480, 320 x 240, 160 x 120	
	Maximum frame rate	25 fps@ 720 x 576, 30 fps@ 720 x 480	
	Video compression format	MPEG-4 Part2 (ISO/IEC 14496-2), Profile: SP and ASP	
	Audio compression format, I/O terminal	G.726 (ADPCM), Full duplex, 16/8 kbps, 3.5mm Mic in x1 and speaker out x1	
	Alarm and event management	Built-in motion detection, Adjustable sensitivity and dwelling time, Emailing	
	Protocols	TCP/IP, UDP, HTTP, RTP, RTSP, DHCP, SMTP, DDNS	
	Ethernet	10 Base-T / 100 Base-T (RJ-45)	
	Pre/Post event	Max. 180 sec	
	Image setting	Color, Brightness, Contrast	
	Function	Event recording, E-mail notification, Remote upgrade, Time/Event search, Remote set-up viewer, Access level, Multicasting capability, Bandwidth control, Alarm/Event/Time searching	
F U N C T I O N	Minimum Operation System	Microsoft Windows 2000/XP, Intel Pentium III 500MHz or higher, 256MB or more	
	Web browser	Microsoft Internet Explorer version 6.0	
	White balance	ATW / AWC / Manual	
	Auto Exposure	Auto / Manual Shutter / Flickerless / AGC	
	AGC	Off / Low / Middle / High	
	Auto iris control	Manual / DC / Video	
	Sens-up	Off / Auto (x2 ~ x128)	
	BLC	Off / Low / Middle / High	
	Display title	Off / On	
	Mirror	Off / On	
	Privacy zone	Off / On (4 point)	
	Day & Night	Auto / Color / B/W	
	DNR	Off / Low / Middle / High	
	Preset	Default / Save / End	
	Power source	DC 12V	
	Power consumption	4 W	
	Power input	2 - Pin wire	
	Video output	BNC connector	
	Operation temperature	- 10 °C ~ 50 °C	
	Operation humidity	0% ~ 96% (non - condensing)	
	Dimensions (Diameter x Height)	Ø 145,0mm x 117,2mm (Bubble diameter Ø 99,0mm)	
	Weight	1,3 kg	
	Housing	Water & Weather proof housing is heavy duty die-cast aluminum	
	Weatherproof IP66	Indoor / Outdoor, Wall or Ceiling	
	Option	Wall or Ceiling Mount Bracket	

* Specifications subject to change without notice *

Dimensions

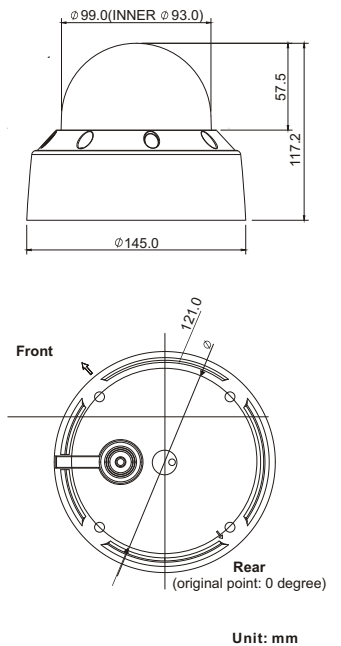

Optional Accessory

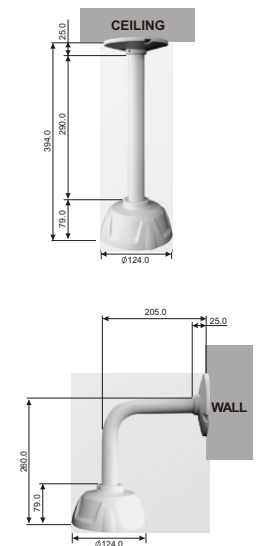

Optional Products

