


SKK-5312 MC1.3LAN

Mega-Pixel Network Camera



- Image Sensor: 1.3 Mega-Pixel CMOS
- MPEG4 / MJPEG Dual Mode & Dual Streaming
- Resolution: 1280 x 1024 at 10 fps; 640 x 480 at 25 fps
- Two-way Audio
- 2 x Digital Input / 2 x Digital Output
- 3GPP for Monitoring via 3G Mobile Phone
- Free 36 CH Recording Software

Back View

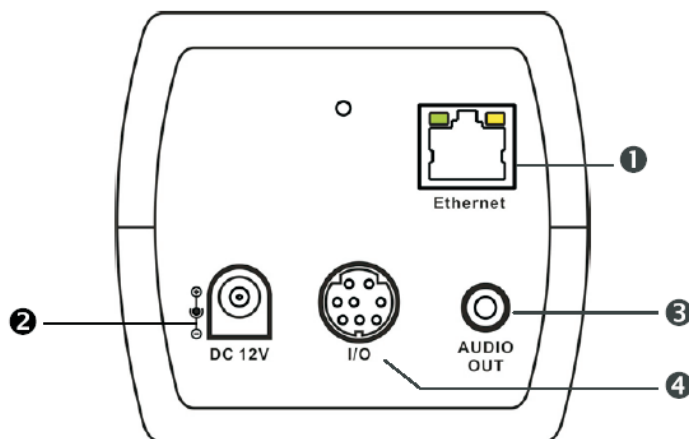

1. Network Connector
2. Power Supply
3. Audio Output
4. Digital Input / Output

SPECIFICATIONS:

MODEL		SKK-5312 MC1.3LAN
Hardware	CPU	ARM 9, 32 bit RISC
	RAM	64 MB
	ROM	8 MB
	Image Sensor	1/4" CMOS
	Lens	Fixed Lens, Focal Length 4 mm, F2.0
	Sensitivity	1.5 Lux
	Lens Changeable	Yes, CS Mount
	Audio Input	Built-in Microphone
	Audio Output	1 Output (RCA Connector)
	Digital Input / Output	2 / 2
	Power Supply	DC 12 V, 1A
	Dimensions	69 (W) x 60 (H) x 151 (D)
Net-work	Ethernet	10 / 100 Base-T
	Network Protocols	HTTP, TCP/ IP, RTP/ RTSP, 3GPP, NTP, SMTP, FTP, PPPoE, DHCP, DDNS
Others	EVENT SYSTEM	
	Event Trigger	Motion Detection, Alarm Input
	Trigger Actions	Send Email, Send to FTP , Digital Output
	CLIENT REQUIREMENTS	
	OS	Windows 2000, XP, 2003, IE6.0
System	Suggested PC	Intel-C 2.0G, RAM: 512 MB, Graphic Card: 64 MB
	Video Resolution	1280 x 1024, 640 x 480, 320 x 240, 160 x 120
	Compression	MPEG-4 / MJPEG
	Frame Rate	10 fps at 1280 x 1024; 25 fps at 640 x 480
	Video Bitrate Adjust	CBR, VBR
	Dual Streaming	Yes (only at Resolution 640 x 480)
	3GPP	Yes, Live View with 3G Mobile Phone
	Image Snapshot	Yes
	Video Adjust	Brightness, Contrast, Exposure, Sharpness, AGC, Night Mode
	Motion Detection	Yes, 3 Different Areas
	Pre / Post Alarm	Yes, Configurable
	Security	Password Protection
	Connection	up to 10 Clients Simultaneously
	Firmware Upgrade	HTTP Mode, Remotely
	Audio	Yes, Two-way

Specifications are subject to change without notice

Display Window

