


# SKK-PANORAMA-PROFI SKK-PANORAMA-STANDARD

*Professional Solution Panoramic Monitoring  
and Recording 360° with Single LAN Camera*

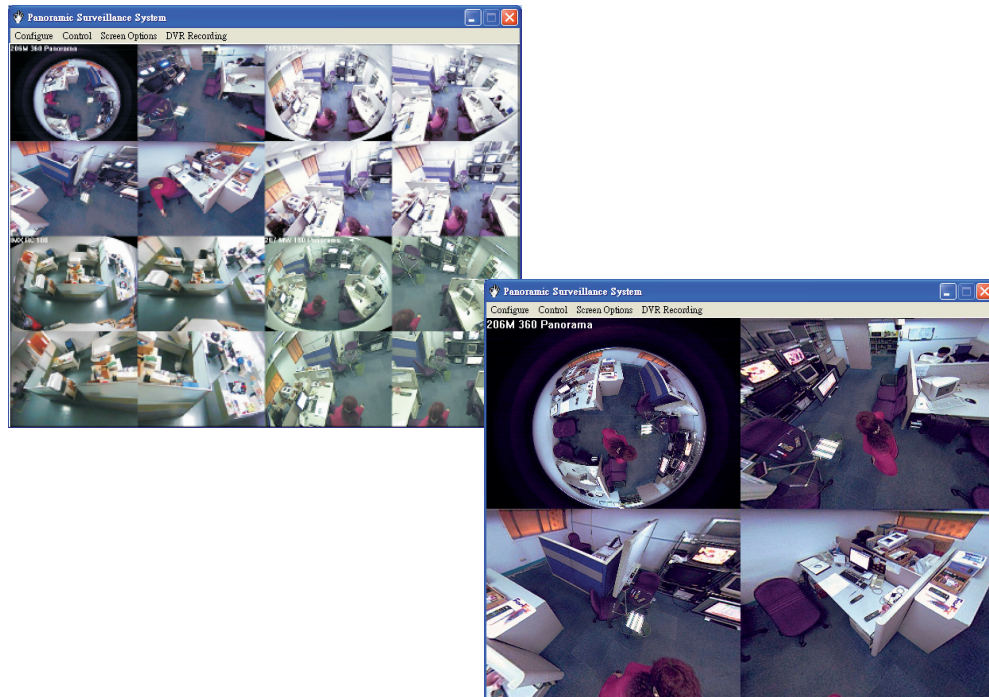


- 24 Panoramic Cameras
- Each Viewer Window Controlled Independently
- High Picture Quality
- Remote Storage for DVR Recording
- Dual Monitor Supported (PROFI)
- Network Cameras Supports SKK-5212 MC1.3LAN; SKK-5312 MC1.3LAN; SKK-5612 MC1.3LAN; SKK-5712 MC1.3LAN
- Multiple Panoramic Imaging Methods
- Compression JPEG / MJPEG
- Motion Detector / Event Trigger
- DVR Recording and Management
- Digital Zoom
- Panoramic Image Engine Kernel
- Application Area: Street, School, Airport, Concert...
- Software Change Camera

**SPECIFICATIONS:**

MODEL	SKK-PANORAMA PROFI / STANDARD
Frame Rate	1.0 ~ 10.0 fps (Each Channel, Dependent on Image Resolution and Compression Quality)
Image Resolution	640 x 480 to Multi-Mega Pixels
Field of View	25 ~ 112
Data Transmission	10/100 Base TCP/ IP
Image Quality	24 Bits True Colour
Max Channel Support	24
Screen Separation	1, 4, 6, 9, 12, 16
DVR	JPEG/MJPEG, 2.0 ~ 12.0 GB a Day
DVR Storage	Both on HDD or NAS
DVR Quality	640 x 480 and Up to 8 MB Pixels
Monitor Type	Single and Dual Monitor
HARDWARE REQUIREMENTS	
CPU	Pentium III CPU or Faster
RAM	1 ~ 4 CH 128 MB, 6 CH above 256 MB
HDD	100 MB Free Disk Space (for Monitor) / 20 GB for DVR Minimum Recording
VGA Card	16 Bits High Colour or above
Monitor	Colour Monitor
Ethernet	10/100/1 G Base
Switch	10/100 Base

Specifications are subject to change without notice

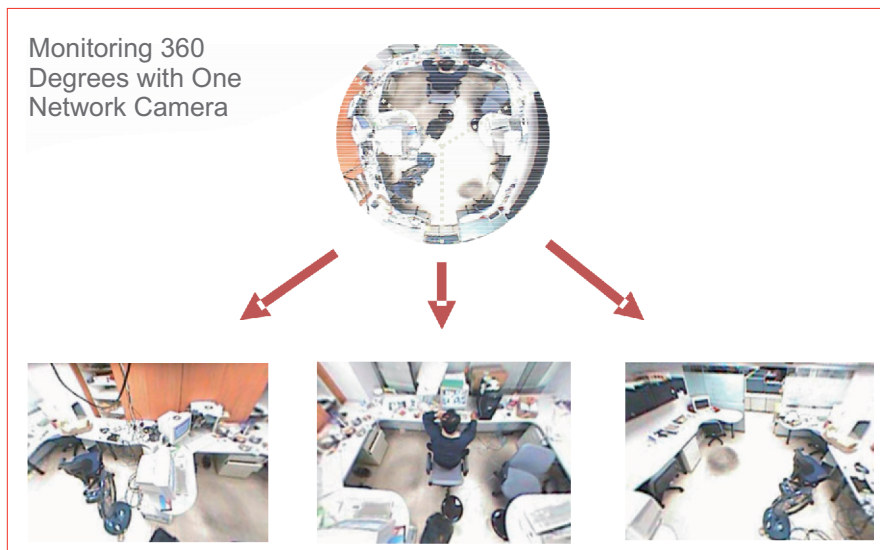**360 Degree Surveillance Screen Shot****180 Degree Surveillance Screen Shot**