

XTR-747VMLCD5 / XTR-747VMLCD

2 Types Keyboard controller

XTRACK
new concept in CCTV systems



XTR-747VMLCD5




XTR-747VMLCD

Specifications

Model	XTR-747VMLCD5	XTR-747VMLCD
Display	5" TFT LCD	16x2 Character LCD
LCD Control	Control Menu	None
Dome Access ID	1~64 Address ID (Alarm Check) 1~254 Address ID (W/O Alarm Check)	1~32 Address ID (Alarm Check) 1~254 Address ID (W/O Alarm Check)
No. of Slave KBD	XTR-747VMLCD – 3 Set XTR-747VMLCD5 – 3 Set	XTR-747VMLCD – 1 Set XTR-747VMLCD5 – 1 Set
Mux Auto Switching Q'ty	5 Set (64 by 4 Matrix)	2 Set
DVR Remote	IDR / ADR / SDR	IDR / ADR / SDR
Schedule	Yes	No
Cam Sequence	Yes	No
Alarm Box	Yes	No
Alarm History	Yes	No
Communication Port	RS-485 (3 Port) – Dome 1 Port Dome 2/DVR Port Mux/Slave Port RS-232C (2 Port) – Dvr Port Alarm/PC Port	RS-485 (3 Port) – Dome Port Mux/Slave Port DVR RS-232C (1 Port) – Dvr Port
Baud Rate (bps)	2,400 ~230,000	2,400 ~230,000
Real Time Display	Yes	TBD
Joy Stick Type	Magnetic type (Large)	Potentiometer type (Large)
Control Key Q'ty	12 Number Key 20 Dome Key 19 Dvr/Mux Key	12 Number Key 20 Dome Key 19 Dvr/Mux Key
Power	DC 12V/Max 10W	DC 12V/Max 3W
Dim (WXHxD/with Foot)	400 × 230 × 118	380 × 168 × 96
Weight (Net)	Aprox 1.9 Kg	Aprox 1.2 Kg

Specifications subject to change without notice

Multi user system with Multiple Mux configuration

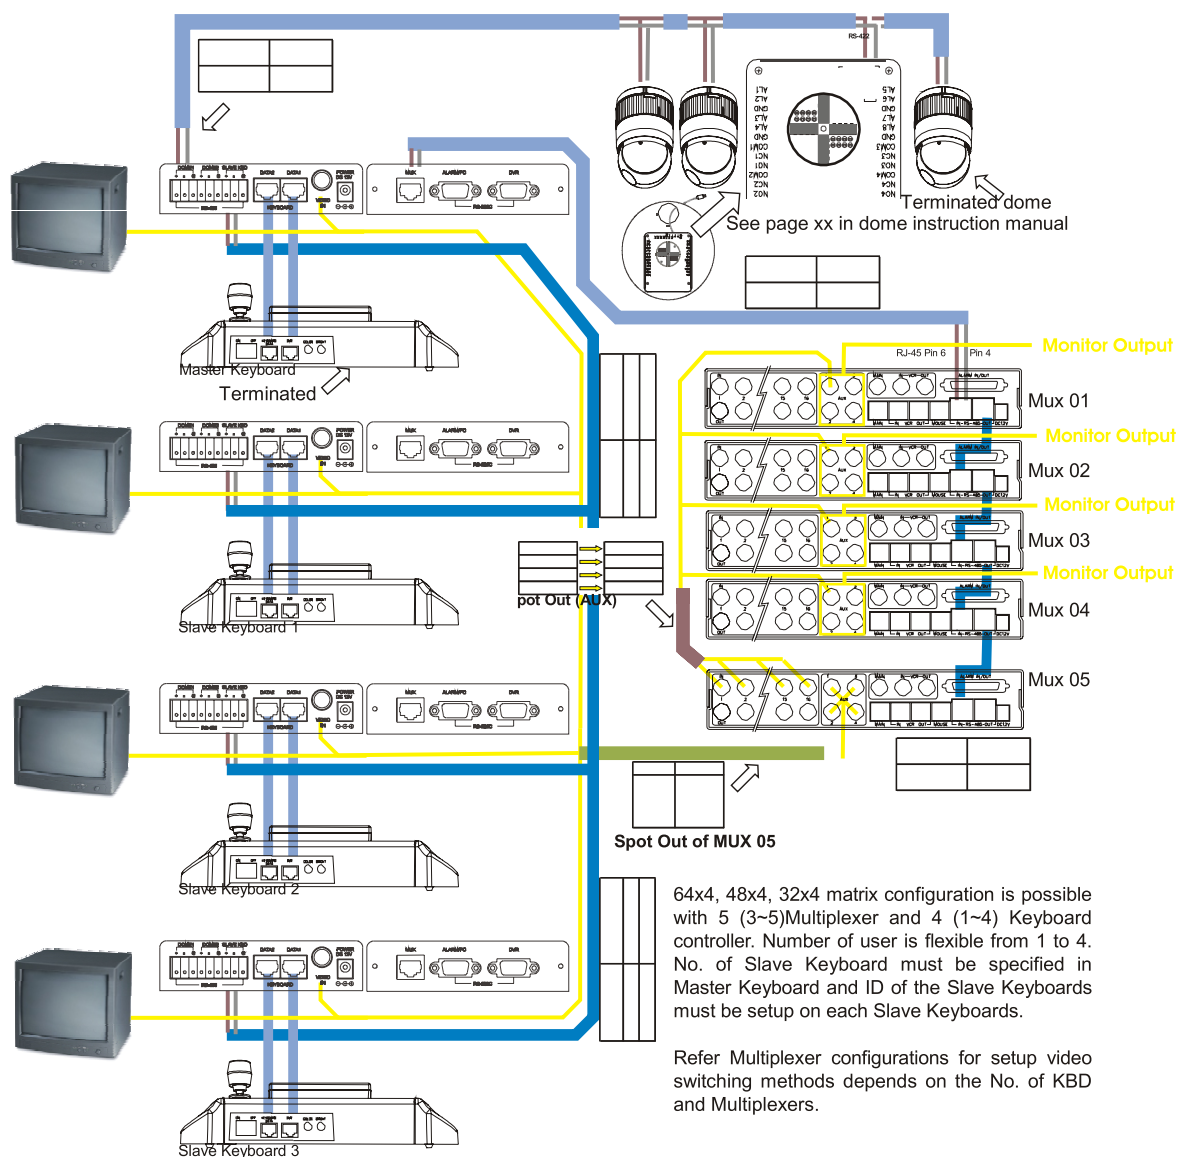

Optional Products

