


SKK-4712P

Colour Antivandal Dome Camera



- High Resolution: 540 ~ 580 TV Lines
- Image Sensor - 1/3" Super HAD CCD / SONY HQ1 DSP
- Colour Rolling / Flickless Control
- Mirror Control Switch
- Housing Standard: IP 66
- Japan Computar Vari-Focal Auto Iris Lens
- BLC Control Switch
- AGC Control Switch
- AES Control Switch
- Unbreakable Housing / Burglar-proof Screw
- 3-Axis Swivel Design (Ceiling / Wall Mount)
- DC 12 V; DC 12 V / AC 24 V Dual Power

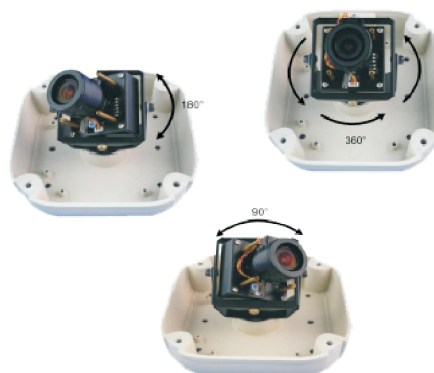

SPECIFICATIONS:

MODEL	SKK-4712P
Image Sensor	1/3" SONY Super HAD High Res. CCD / SONY HQ1 DSP
Picture Elements	PAL: 752 (H) x 582 (V)
Scanning Frequency	PAL: 15625 Hz(H) 50 Hz(V)
High Resolution	540 TV lines or above (580 TV Lines, F1.0)
Sensitivity	0.05 Lux (F1.2)
Sync. System	Internal Sync., 2:1 Interlace
Auto White Balance	On/Off; Colour Rolling Reduce switchable
Auto Gain Control	On/Off
S/N Ratio	more than 52 dB (AGC Off)
Gamma	0.45
Auto Electronic Shutter	Auto [1/60(50) ~ 1/100,000]; On/Off switchable
Video Output	1.0 V[p-p], 75 Ohm
Lens Mount	Japan Computar: Build with 3 ~ 9 mm (F1.2) Auto Iris Lens 9 ~ 22 mm (F1.4) Optional
Back Light Compensation	Auto; On/Off
Power Supply	DC 12 V / 130 mA (DC 12 V / AC 24 V Dual Power Optional)
Operating Temperature	-10°C ~ +50°C (Heater Optional)
Dimensions / Weight	136 (Ø) x 106 (H) mm / 700 g

Specifications are subject to change without notice

Dimensions

